

Installation Instructions and User Guide

AVANTI

Pro 800

Garage Door Opener

8002-0011-05R V1.2

Important Safety Instructions

It is important for the safety of persons to follow all instructions. Follow all instructions as incorrect installation can lead to severe injury. Save these instructions.

- Before installing the drive, check that the door is in good mechanical condition, correctly balanced and opens and closes properly.
 - The drive is intended to be installed at least 2.5 m above the floor or other access level;
 - Can be used with doors having openings greater than 50 mm in diameter;
 - Is intended for automatic operation.
- The door is deemed to be well balanced and aligned if it:
- a. requires an equivalent amount of applied force to either manually open or close,
 - b. requires no more than 150N (15kg) of applied force to either manually open or close,
 - c. does not rise or fall more than 100mm when released at any point between fully open or fully closed positions,
 - d. does not rub on or incorrectly make contact with any supporting or surrounding structures
- Have a qualified person check and make repairs if required.
 - Before installing the drive, remove all unnecessary ropes or chains and disable any equipment, such as locks, not needed for powered operation.
 - Install the actuating member for the manual release at a height less than 1.8m
 - Permanently fix the label concerning the manual release adjacent to its actuating member.
 - Install any fixed control at a height of at least 1.5m and within sight of the door but away from moving parts.
 - Permanently fix the labels warning against entrapment in a prominent place or near any fixed controls.
 - After installation, ensure that the mechanism is properly adjusted and that the drive reverses when the door contacts a 50 mm high object placed on the floor, for drives incorporating an entrapment protection system depending on contact with the bottom edge of the door.
 - After installation, ensure that the parts of the door do not extend over public footpaths or roads.
 - After installation, ensure that the drive prevents or stops the opening movement when the door is loaded with a mass of 20 kg, fixed centrally on the bottom edge of the door (for drives that can be used with doors having openings larger than 50 mm in diameter).
 - Never use the Drive unless the garage door is in full view and free from any object which may impede its movement such as cars or persons.
 - This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand


- the hazards involved.
 - Children shall not play with the appliance.
 - Cleaning and user maintenance shall not be made by children without supervision
 - Do not allow children to play with door controls. Keep remote controls away from children;
 - Watch the moving door and keep people away until the door is completely opened or closed.
 - Take care when operating the manual release since an open door may fall rapidly due to weak or broken springs, or being out of balance.
 - Frequently examine the installation, in particular check cables, springs and mountings for signs of wear, damage or imbalance. Do not use if repair or adjustment is needed since a fault in the installation or an incorrectly balanced door may cause injury.
 - Each month check that the drive reverses when the door contacts a 50 mm high object placed on the floor. Adjust if necessary and recheck since an incorrect adjustment may present a hazard.
 - Never attempt to open or close the garage door by pulling on the Engage/Disengage Cord.
 - Removal of the protective covers must only be performed by a technically qualified person.
 - Never attempt to make any repairs or remove covers from the Drive without first disconnecting the power cord from power supply.
 - For safety reasons always ensure that the garage door is fully open and stationary before driving into or out of the garage.
 - For security reasons always ensure the garage door is fully closed and stationary before moving out of its view.
 - Keep hands and loose clothing clear of the Drive and moving garage door at all times.
 - In order for the Safety Reverse system to function it must first encounter an obstruction in the form of an object/person on to which some force **must** be exerted. As a result the object/person/garage door may suffer damage and/or injury.
 - Adjustments to the Safety Reverse system settings must only be carried out by a technically qualified person.
- The Safety Reverse System is designed to work on STATIONARY objects only. Serious personal injury, death and/or property damage may occur if the garage door comes into contact with a moving object during an opening or closing movement.
- For additional safety we strongly recommend the inclusion of Safety Beams. Although the Drive incorporates a pressure sensitive Safety Reverse system, the addition of Safety Beams will greatly enhance the safety of an automatic garage door and provide additional peace of mind. In some countries it is a mandate of law to fit Safety Beams. It is the sole responsibility of the owner/installer to fit Safety Beams in those countries that so require.

A Installation and Setup


1 Assemble Rail, Tension Chain



2 Load Rail

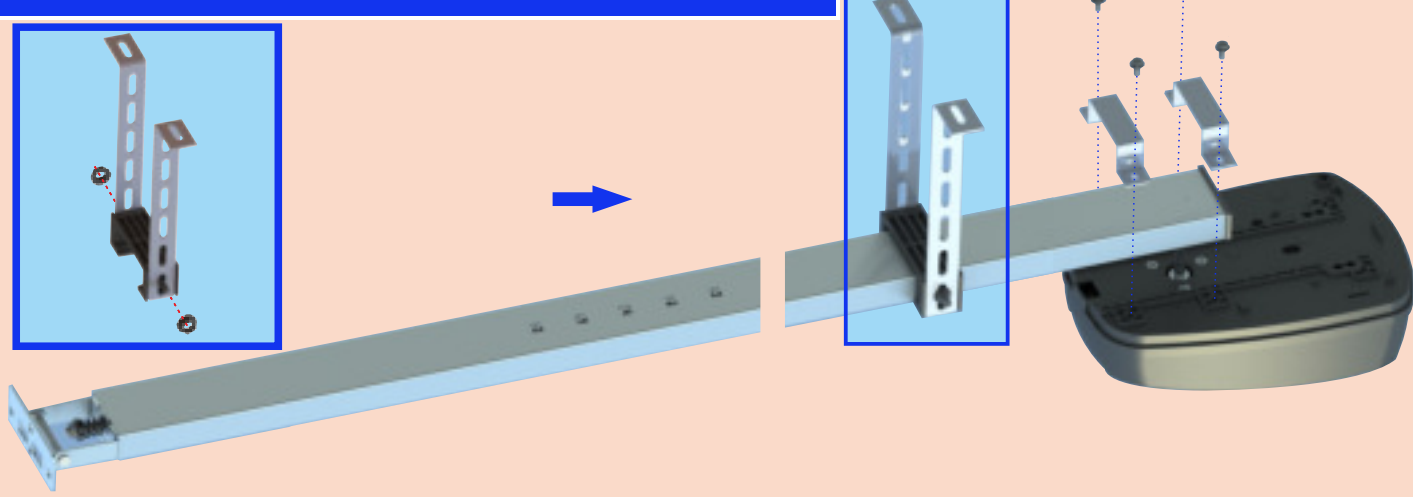


3 Mount Brackets and Rail

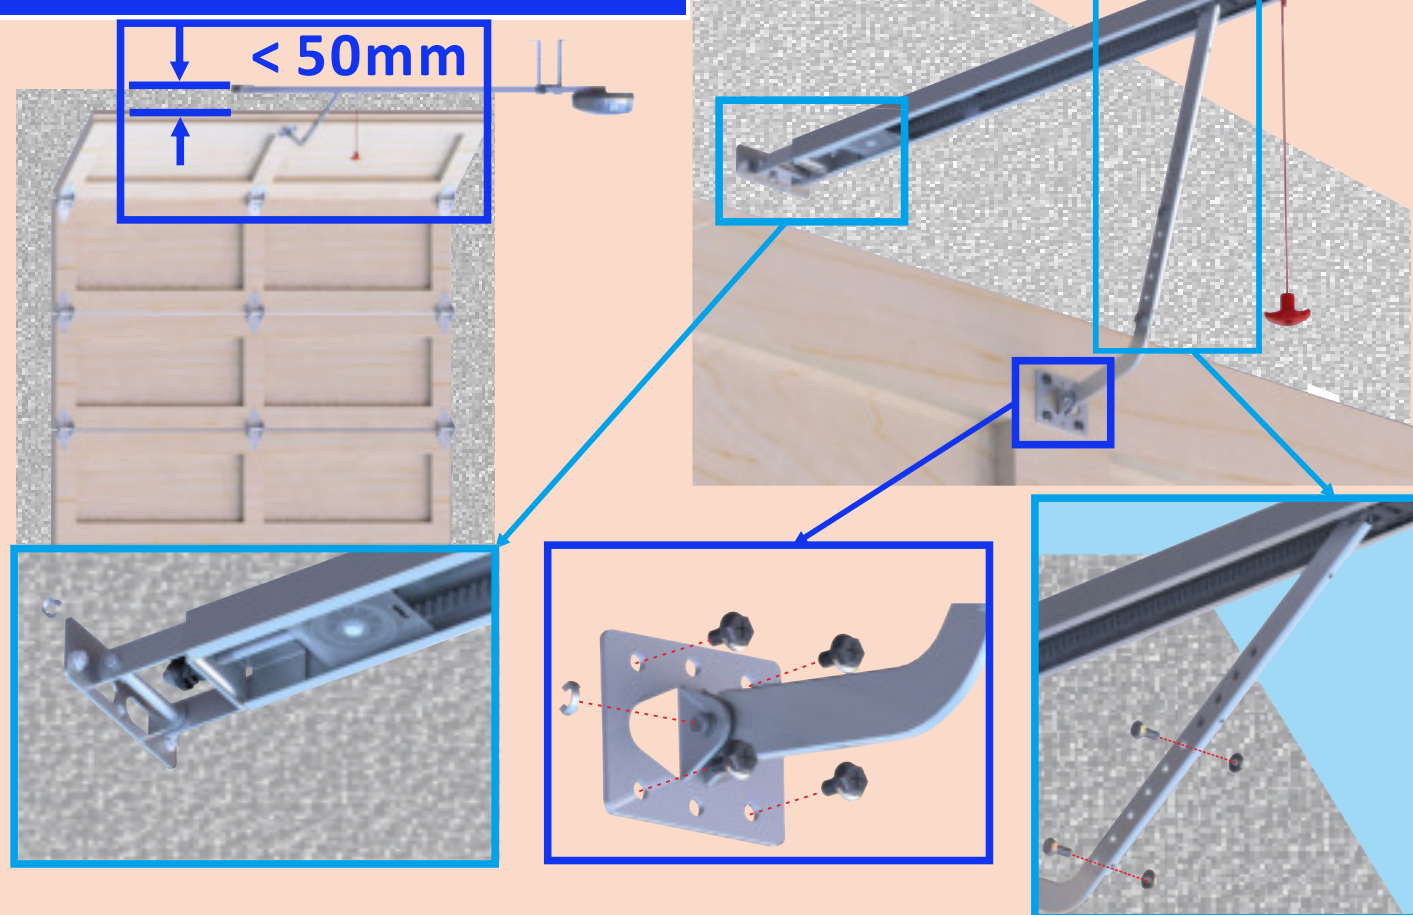


4a Position "CLOSE" Stopper

CLOSE the Door by hand then position the Stopper as shown in drawing 10mm away from carriage and firmly tighten the lock screws.

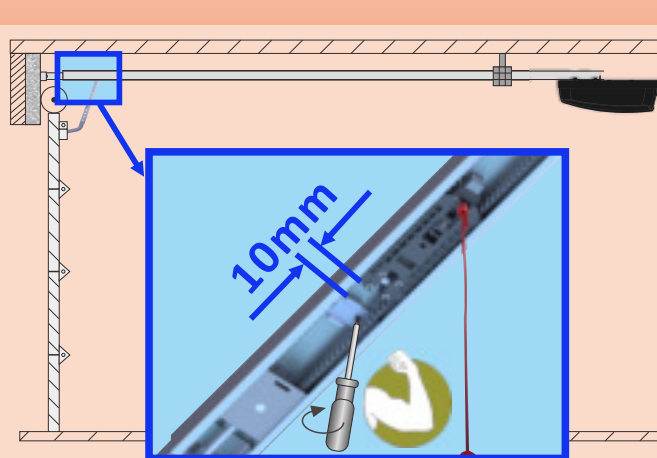


4b Position "OPEN" Stopper

OPEN the Door by hand then position the Stopper as shown in drawing 10mm away from carriage and firmly tighten the lock screws.

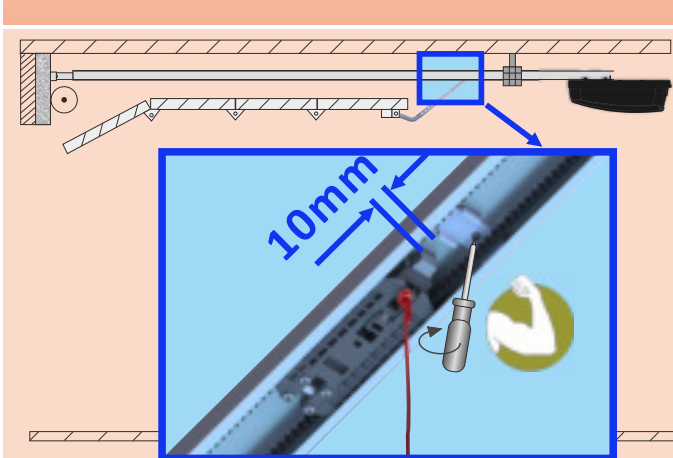


5 Pull Lever, Engage Bullet into Carriage

Pull Lever to horizontal position. Then pull the door down by hand until bullet engages into carriage and "Click" sound is heard.

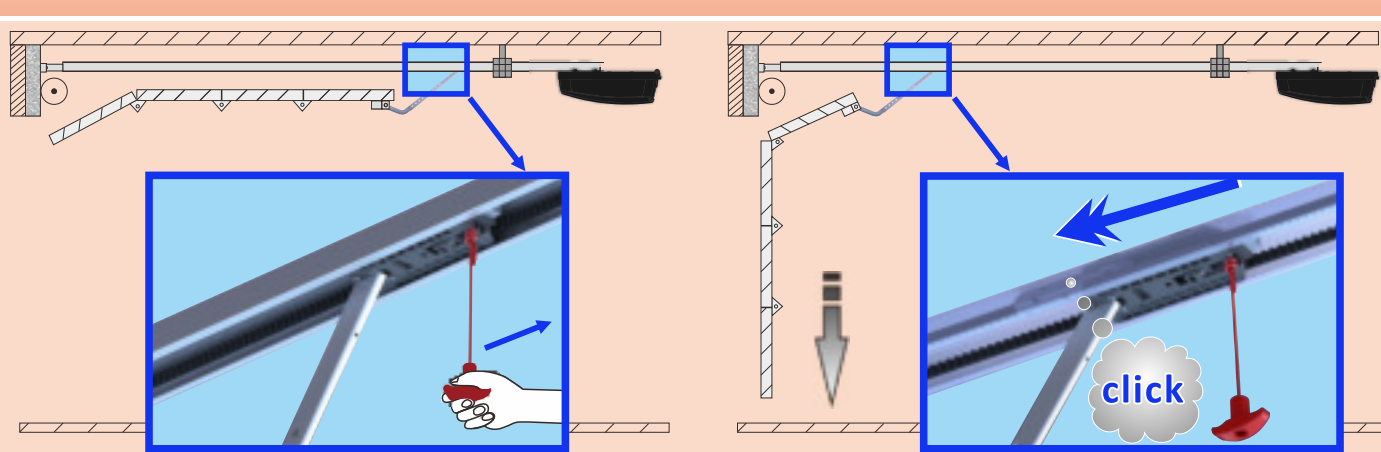


6 Connect to Power Supply

Once connected to Power Supply Courtesy LED Light will begin to flash. is shown in Display. Opener is now in Limit/Force Learn Mode.

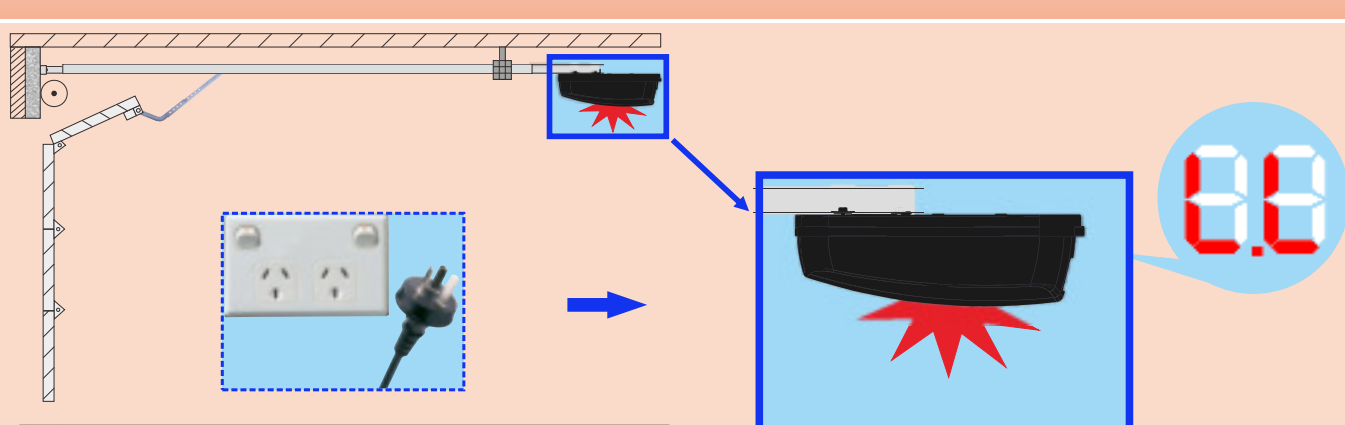


7 Press Transmitter Button

Short Press Transmitter Button 1.
1.) Door will **AUTOMATICALLY CLOSE** until reaching Close Position...

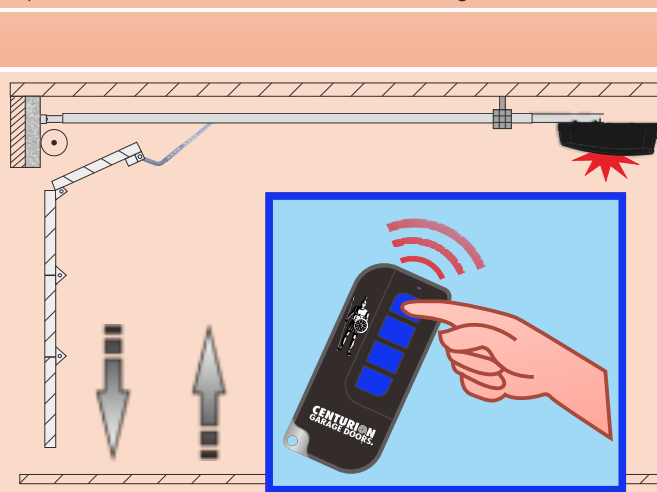

8 ... Learning Complete !

2.) ... and then **AUTOMATICALLY OPEN** completely, 3.) and then **AUTOMATICALLY CLOSE** again. Learning Complete when Blinking and extinguishes.

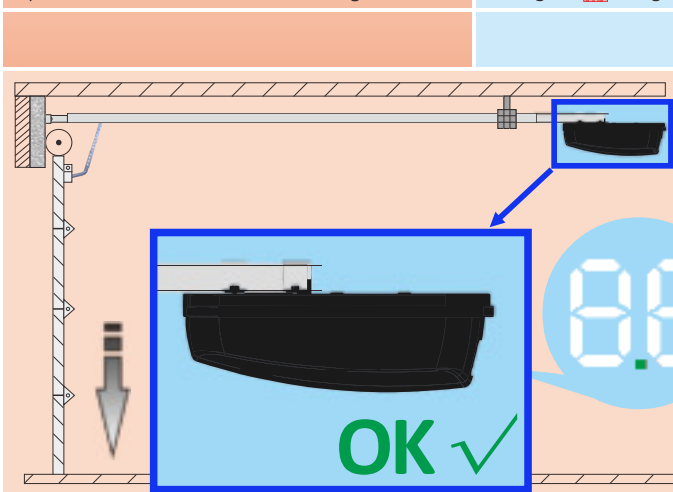

B OPTIONAL: Fine Tune Close Position

Close Limit Position can be Fine-Tuned after Learning Process has been completed.

Fine Tune Close Position via Button

- 1.) Put Door into **CLOSE POSITION**.
- 2.) Press for 5 seconds until display shows .
- 3.) Now, adjust Close position by pressing or . Each Press equals 3 mm of travel.
- 4.) To confirm new Close Position, short press .

C

OPTIONAL: Fine Tune Safety Offset Value

Safety Offset Value determines how easily the door Safety Reverses/Safety Stops when hitting an obstruction.

In order to prevent "ghosting" on a big, badly sprung or worn out door, Safety Value needs to be set to a **higher value** (max.= **F5**);

In order to achieve a more sensitive Safety Reversing, Safety Offset Value needs to be set to a **lower value** (min.= **F3**).

Safety Offset Values can be fine tuned **at any time**.

1

Fine Tune Safety Offset Value

2

Set Safety Offset Value to Maximum

1.) In Standby, Press **F** or **⬅**. The current Safety Offset Value is shown.

2.) Press **⬆** to increase or **⬇** to decrease the Value, **F** being the most sensitive and **F5** being the least sensitive value.

3.) To confirm new Safety Offset Value press **⬇**.

4.) To leave without changes wait 10 seconds or press **⬇**.

1.) To achieve an installation with a **maximum of power** and **least sensitive** Safety Reverse/Safety Stop set Safety Offset Value to **F5** as shown besides.

2.) If **F5** is still too sensitive, go to Function Setup **D** and set **F** to **0H**. Now Safety Reverse is almost turned off, and Safety Offset Value is **F6**.

ATTENTION, with Safety Offset Values set to Maximum the door is dangerous and it is recommended to use a Photo Safety Beam.

D

Control Panel Functions

In Learn Mode **LL**: Moves bullet in backwards or forwards direction

In Standby: Increase or Decrease Force Offset Values

Press **F** and **⬇** together: Enter Function Setup Menu

In Function Setup Menu: Scroll Functions and Values

In Transmitter Setup Menu: Scroll Functions

Short Press: Enter Transmitter Setup Menu (see **F 3**)

Long Press (5 sec): Forced Relearn/Fine Tune (see **G 11, 12**)

In Standby: Acts as Run Button (Open and Close Door)

In Setup Menus: Confirm Button and Courtesy Light both act as run buttons (Open, Stop, Close the door)

E

Transmitter Functions Ex Factory

1

Run Function

Alternately Opens, Closes or Stops the Garage Door.

2

Light / Transmitter Coding

Short Press - Switches Courtesy LED Light ON and OFF.
Long Press (5 sec) - Enter Transmitter Setup Menu. see **F 3** for details.

3

Vacant

4

Vacant

1

Battery Replacement

1

2

3

F

Transmitter Coding

1

Bulk Coding via Transmitter (setup as shown in **E**)

- Long press **Light Function** (Button 2 on pre-coded Transmitter) for 5 sec,
 - Courtesy LED Light begins to flash.
 - Press new Transmitter **twice**,
 - Learning Complete.

2

Delete all Transmitters

- Short press **Learn** on Opener,
- Long press 5 sec **Confirm** until light starts flashing,
- Deleting Complete.

3

Assign Certain Functions to Certain Transmitter Buttons

- Short press **Learn** on Opener, → Use **F** and **⬇** to choose the desired function (see below).
- Short press Transmitter Button **twice**, → Learning Complete.

bu	Bulk Coding TX learns Functions as shown in E	
ho	Ventilation / Holiday Mode Function Puts Opener into dormant state if closed.	
ru	Run Function Open/Stop/Close	
li	Light Function Controls Courtesy LED Light	
Ro	Run Function/Auto Close Override Open/Stop/Close, without Auto-Close	
oo	OPEN Function Only OPENS Door	
co	CLOSE Function only CLOSES Door	

G

Menu Functions

1.) To Enter Function Setup Menu: press **F** and **⬇** at the same time.

2.) Use **⬆** and **⬇** to scroll up or down through the functions.

3.) Press **⬇** to select the desired function.

4.) Now choose value with **⬆** and **⬇**. Confirm chosen value by pressing **⬇**.

5.) To Exit Function Setup Menu at any time: press **⬇**.

Function	Description	Values
SB	Safety Photo Beam	0F Disable Safety Beam 28 Enable Safety Beam in CLOSE and OPEN Direction. 0H Enable Safety Beam in CLOSE Direction
AC	Automatic Close Function Safety Beams SB must be installed and enabled!	0F Safety Beam Function SB not enabled 0F No Auto-Close 0S 5 sec / 30 sec 1S 15 sec / 90 sec 30 30 sec / 180 sec If Safety Beam is activated by passing car or person: Door automatically closes after 5/15/30 sec. If Safety Beam is NOT activated by passing car or person: Door automatically closes after 30/90/180 sec.
AS	8.2 kOhm Safety Contact Strip	0F Function not available in this version
SP	Running Speed of Opener	HF High Speed EO Tip Up Door Speed LO Low Speed After setup, li will start. Follow Steps A 7 - 8
SS	Slow Stop Function	0F No Slow Stop SH Short Slow Stop LO Long Slow Stop After setup, li will start. Follow Steps A 7 - 8
FP	Full Power Mode	0F Standard Power 0H Full Power: See C 2 for details After setup, li will start. Follow Steps A 7 - 8
EL	Courtesy Light illumination time	0F 1 min 02 2 min 03 3 min
PR	Partial reverse / Full reverse	0F After Hitting Obstruction, Door will: Fully Reverse 0H After Hitting Obstruction, Door will: Partial Reverse
SR	Signal Reverse / Signal stop	0F At press TX in Close Direction, Door will: Stop 0H At press TX in Close Direction, Door will: Reverse Handsendersignal während ZU-Fahrt: Antrieb reversiert
VE	Ventilation Mode Time	0F OFF 1S 30 45 60 75 90 If door is idling in VentilationPosition, SB shows in Display.
02	Ventilation Re-Opening Height	0F OFF 02 - 09 Height of Ventilation Slit With activated Ventilation Mode: Short Press Ventilation Mode Button on Transmitter (2nd Button on Bulk Coded Transmitter). Door will close completely, and then re-open between 2-18 cm for Ventilation Purposes. After set 15/30/45/60/75/90 min door will automatically close.
DS	Door Service Monitor	0F OFF 0H If Door is out of Balance, Light will flash during run to warn user
CP	Car Park Mode	0F OFF 0H Hard wired Accessories (Switch, CarLink, Card Readers, etc.) only trigger OPEN Function
RE	Maximum Run Time	30 Opener Stops after 30 sec Run Time 60 Opener Stops after 60 sec Run Time
BU	Back Jump	0F OFF 0H After reaching Close Position, Motor drives back 3mm to release pressure from door
FL	External Flash Light Output	0F Function not available in this version
Ho	Holiday Mode: Turn on by pressing Holiday Function (Button 2 on Pre-Coded TX) for 3 seconds. Places Opener in a dormant state after if closed. Ho is displayed.	
FR	Factory Reset: Initiate Reset by pressing ⬇ and power on at same time until Display shows FR . Previously coded TX will not be deleted.	
LE	Forced Relearn: Drive Door into ANY Position but CLOSE . Long Press ⬇ for 5 sec until Display shows LE . See A 7 - 8 for further instructions.	
CE	Fine Tune CLOSE Position: Drive Door into CLOSE Position. Long Press ⬇ for 5 sec until Display shows CE . See B for further instructions.	
FE	Automatic Relearn: After 3 consecutive Safety Reverses/Safety Stops an Automatic Relearn of Force Values is triggered. During that Learn Cycle, FE is displayed.	

H

Error codes

If an error is encountered the Courtesy Light will triple flash and an error code (Show **F** in box) will illuminate on the display panel!

01

Error: Safety Beams misaligned or damaged.
Fix: Check Safety Beam pilot light to ensure that beams are aligned. Check that wiring is intact and properly connected.

02

Not applicable

03

Error: Door Service Monitor - indicates that door is out of balance.
Fix: Disengage opener from door and manually check if door is correctly balanced.

04

Error: Run Time - Indicates that 30 sec Run Time limit has been reached.
Fix: Refer to Menu Functions section and increase Run Time to 60 sec.

05

Error: Exceed factory set maximum power level during Limit Learn Mode (LL).
Fix: Check spring balance of door. May suggest the door is too heavy for the opener.

06

Error: Exceed offset level during safety reverse or safety stop.
Fix: No action required.

07

Error: Exceed maximum current limit.
Fix: No action required.

08

Error: Blown fuse
Fix: Change the fuse

09

Error: Hall sensor signal not present.
Fix: Check that hall sensor connector is firmly plugged into main PCB. Replace hall sensor assembly.

I

Connection Plan