

Installation Instruction and User Guide



WiFi ID
CGD_6B04




CENTURION
GARAGE DOORS®




A. Retrofit Kit Installation

1. Turn off the main power.
2. Unscrew the fixing screw and open the cover.

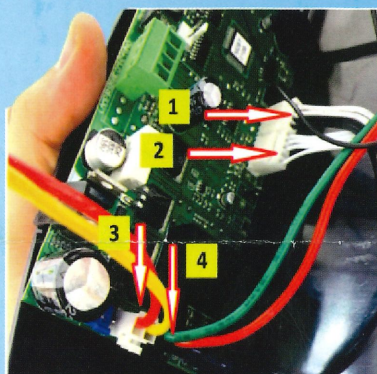


3. Disconnect the cables 1, 2, 3, 4.
4. Remove the cover.
5. Take the WIFI Camera kit.

6. Attach the cover and reconnect the cables 1, 2, 3, 4.
7. Skip to B-2.

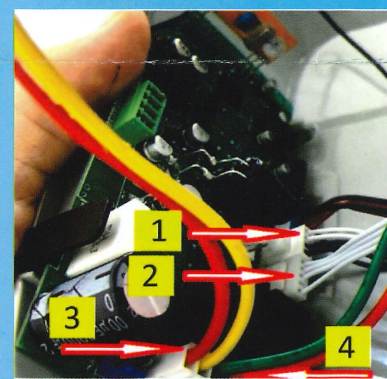


B. External Antenna Installation

1. Unplug the opener from the power point. Undo the fixing screw and hinge down the cover.

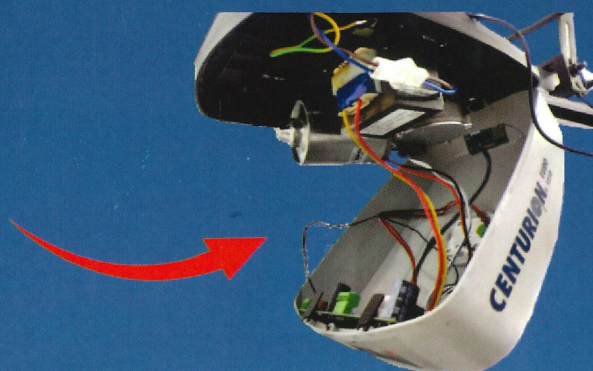


- 2. Mount the antenna on the side of the rail as far as possible from the unit. Run the antenna wire on top of the rail to the power head.**

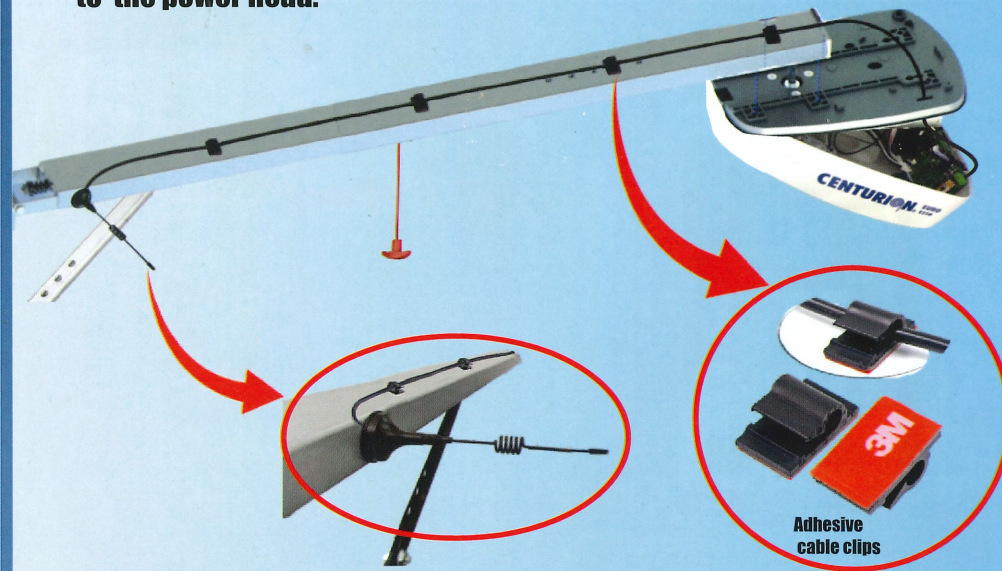


- 3. Insert the antenna wire through the hole in the chassis as shown in the picture.**

- 4. Jiggle the original antenna wire left-right, left-right until it breaks off. Connect the external antenna wire into the antenna port as shown in the picture.**

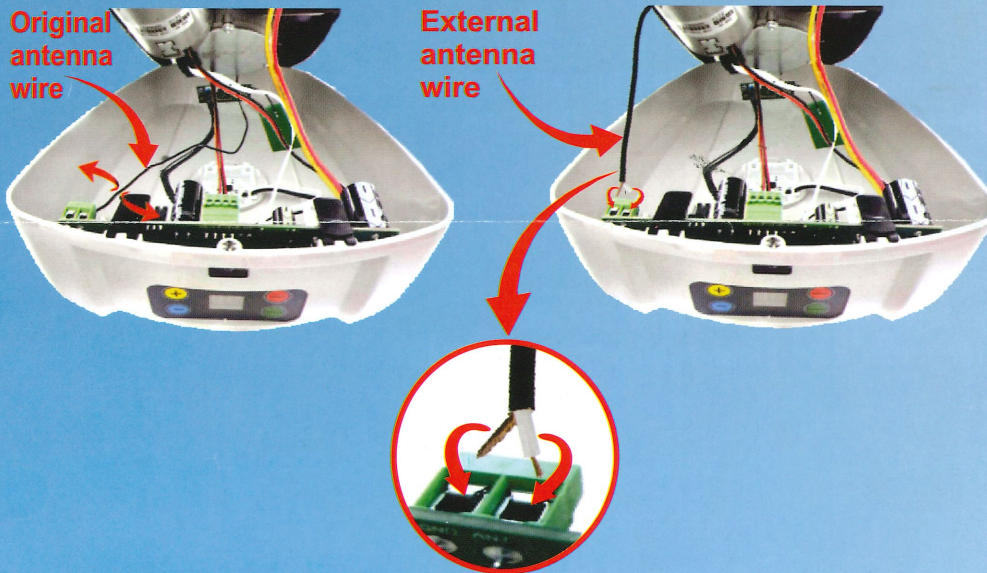

- 5. Close the cover and tighten the fixing screw.**

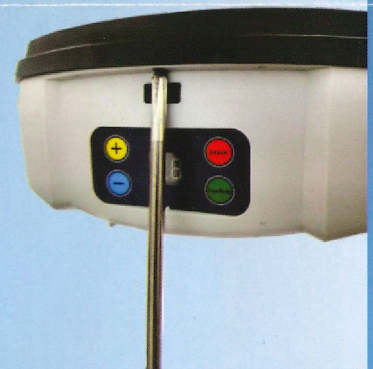

Relearn Transmitter Procedure

- 1. Short press "Learn". Display shows "bu".**
- 2. Press new transmitter button twice.**
- 3. Learning complete when Blinking and "bu" extinguishes.**


Relearn Limits Procedure

- 1. If "LL" is not displayed then long press "Learn" until display shows "LL".**
- 2. Short press transmitter button. Door will automatically Close/Open/Close.**
- 3. Learning complete when Blinking and "LL" extinguishes.**



C. WIFI SETUP PROCEDURE






1. Power up opener - camera halo light will glow solid red.

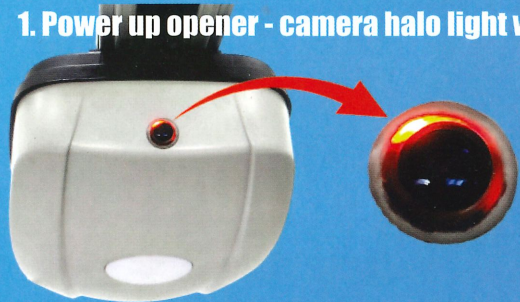

2. Download "Centurion Garage Doors" app in Play Store/App Store.






3. Create an account.

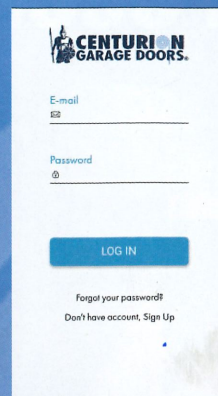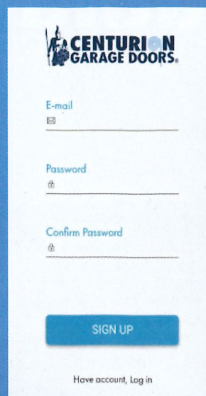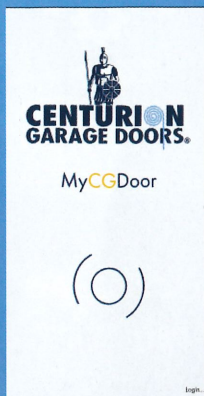




4. Logging in - enter User name and Password.

5. Add New Door.



6. For Android Press "ADD NEW DOOR" and type your modem WIFI Name, enter WIFI password, then click "NEXT".

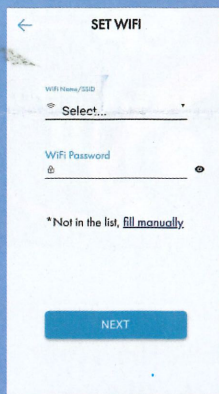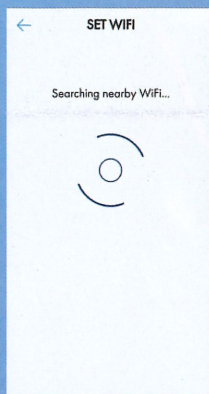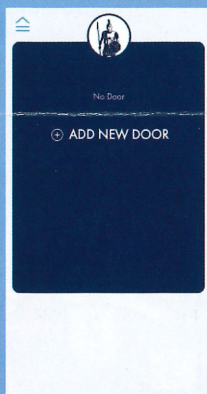

6.1 For Apple Press "ADD NEW DOOR" and type your modem WIFI Name and enter WIFI password. Type 4 digit WIFI ID or scan your QR code from the device label then click "NEXT".

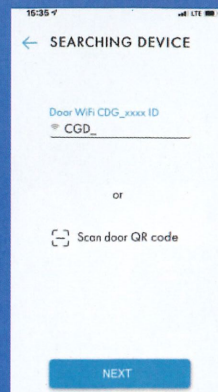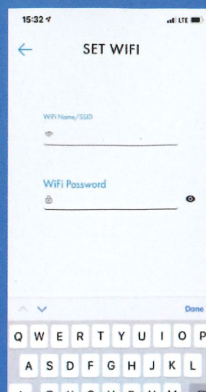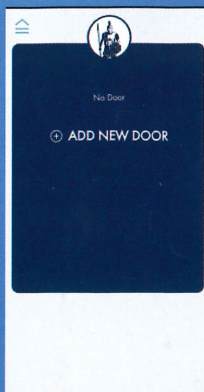

7. Wait for pairing of the device to be completed and press "DONE" - camera halo light will glow solid green. The application will show you the connected door. If pairing does not complete then please refer to point 8.

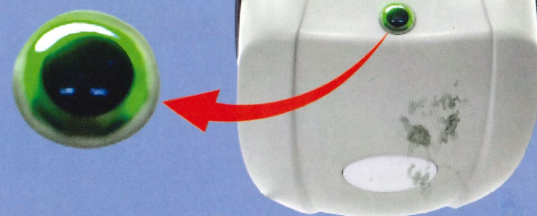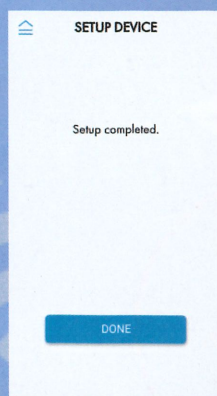

8. Resetting the Device

In the event that configuration does not complete or in the case that a new modem is installed please carry out the following reset procedure;

Simultaneously press and hold the minus "-" button and the light button (underside of opener). Light button will quick flash several times to indicate that reset is complete. Continue configuration by returning to point 4.

9. Troubleshooting

Camera halo light blinking green - Internet connection is not present.

Camera halo light blinking red - technical fault, please call retailer for service.

